



TNC

N-type Half-cell Bifacial Module (66)

TWMNH-66HD

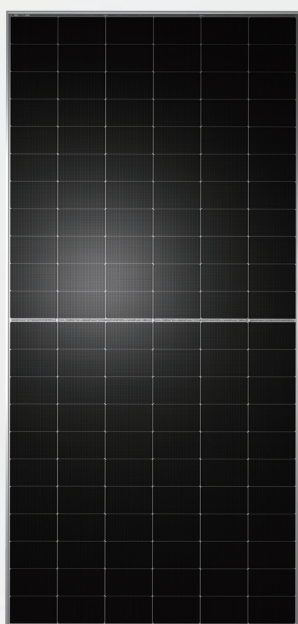

620-640W




Higher power generation, lower LCOE




Applicable to utility-scale PV plants



Applicable to C&I rooftops

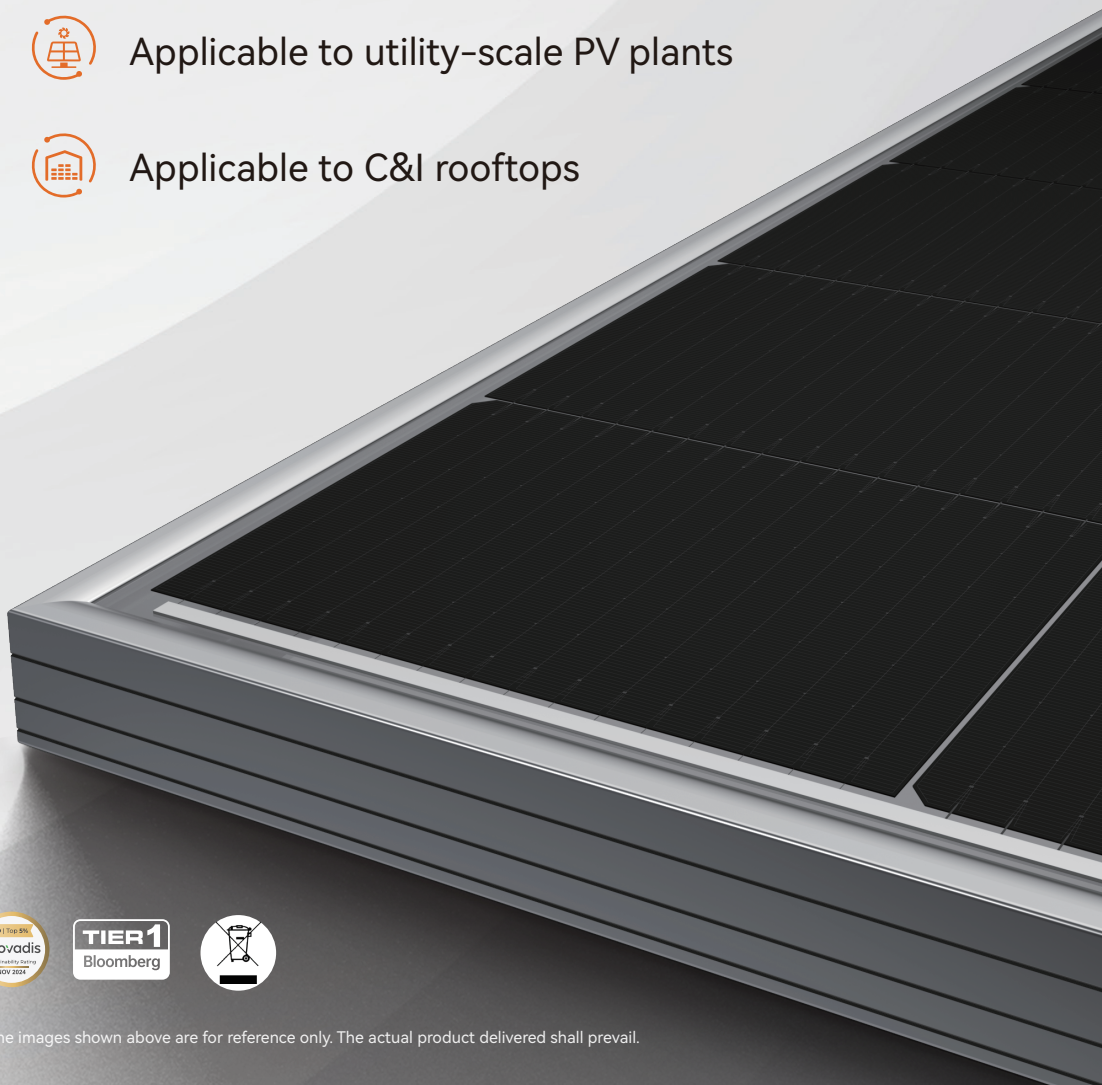

Drawings (Unit: mm)

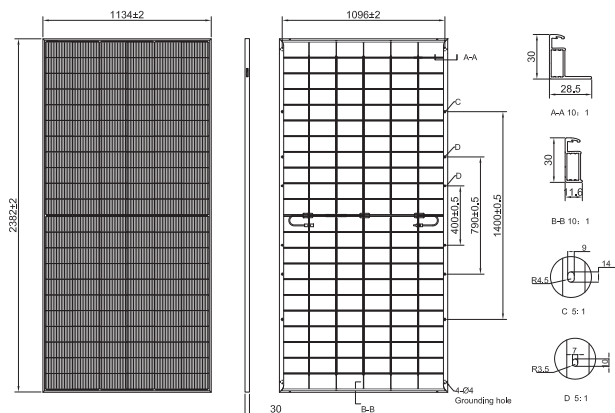

Electrical Characteristics (STC)

Module type: TWMNH-66HDXXX

Maximum Power: P _{max} [W]	620	625	630	635	640
Open Circuit Voltage: V _{oc} [V]	49.10	49.30	49.50	49.60	49.75
Short Circuit Current: I _{sc} [A]	16.06	16.12	16.18	16.26	16.33
Voltage at Maximum Power: V _{mp} [V]	40.82	40.96	41.10	41.24	41.38
Current at Maximum Power: I _{mp} [A]	15.19	15.26	15.33	15.40	15.47
Module Efficiency: η [%]	23.0	23.1	23.3	23.5	23.7

* STC: Irradiance 1000W/m², Cell temperature 25°C, AM=1.5, Power measurement tolerance: ±3%.
The above electrical parameters are for module grading only, not for individual modules.

Electrical Characteristics (BNPI)

Maximum Power: P _{max} [W]	684.6	690.2	695.4	701.1	706.8
Open Circuit Voltage: V _{oc} [V]	49.10	49.30	49.50	49.60	49.75
Short Circuit Current: I _{sc} [A]	17.73	17.80	17.86	17.95	18.03
Voltage at Maximum Power: V _{mp} [V]	40.82	40.96	41.10	41.24	41.38
Current at Maximum Power: I _{mp} [A]	16.77	16.85	16.92	17.00	17.08

* BNPI: Front side irradiance 1000W/m², Rear side irradiance 135W/m², Cell Temperature=25°C, AM=1.5, Power measurement tolerance: ±3%.
The above electrical parameters are for module grading only, not for individual modules.

Electrical characteristics with different rear side power gain

Maximum Power: P _{max} [W]	713	718	724	730	736
Module Efficiency: η [%]	26.4	26.6	26.8	27.0	27.2

Temperature Rating

Temperature Coefficient of P _{max}	-0.28%/°C
Temperature Coefficient of V _{oc}	-0.24%/°C
Temperature Coefficient of I _{sc}	+0.046%/°C

* Due to differences in test methods and equipment, actual measured values may deviate slightly from the above nominal values.

Operating Parameters


Operating Temperature*	[T ₉₈] ≤ 70°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30A
Power Output Tolerance	0~+3%
Bifaciality coefficient of P _{max}	80±5%
Bifaciality coefficient of V _{oc}	98±5%
Bifaciality coefficient of I _{sc}	80±5%

*The module operating temperature can reach up to 85°C for short term.


Mechanical Parameters

Cell Type	TNC
Cell Orientation	132 [6×22]
Dimension	2382±2×1134±2×30mm
Weight	32.5kg
Front Glass	2.0 mm AR coating semi tempered glass
Rear Glass	2.0 mm semi tempered glass
Frame	Anodized aluminum alloy frame
Junction Box	IP68, 3 diodes
Cable	4.0mm ²
Cable Length	+400 mm, -200 mm or ±1,400 mm; length can be customized
Maximum Static Test Load	5,400 Pa (Positive) / 2,400 Pa (Negative)
Packaging (Per pallet)	36 pcs
Packaging	720 pcs per 40'HC

Warranty

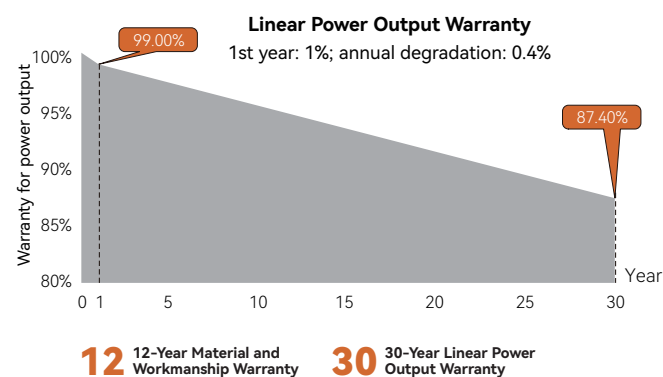

Curve

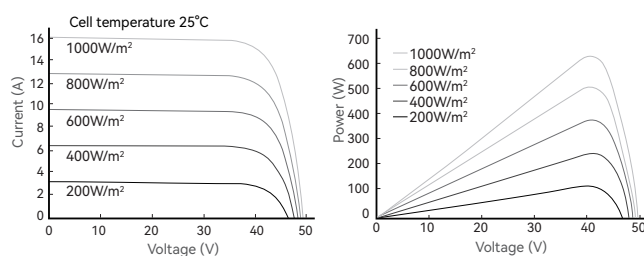

Certifications

Quality Management System and Product Certification

ISO 9001: 2015 / Quality Management System
ISO 14001: 2015 / Environmental Management System
ISO 45001: 2018 / Occupational Health and Safety Management System
ISO 50001: 2018 / Energy Management System
IEC 62941: 2019 / Quality System for PV Module Manufacturing
IEC 61215 (2021) / IEC 61730 (2023), IEC TS 62804,
IEC 61701, IEC 62716, IEC 60068-2-68



Scan the code for more information